

Rebar Cutters & Benders



Reduce labor, increase profits

Construction Starts Here

www.multiquip.com



Rebar Cutters

The powerful cutting strength of Multiquip rebar cutters enables one operator to cut rebar faster and easier than with manual cutters, torches and saws.

Multiquip's Rebar Cutters put enormous strength right in your hands. Slice through rebar safely and efficiently with the squeeze of a trigger. Compact, handheld units move easily around any job site.

Use the HBC-series for maximum versatility. These electro-hydraulic cutters handle virtually any rebar cutting job, from slabs and masonry walls to large buildings and bridges. At only 27 to 48 lbs, the HBC is easily carried around job sites. Even overhead work takes minimum effort.



Model HBC-19 cuts rebar up to 0.75" thick in only 3 seconds.




HBC-series models are available with cutting capacities up to 1" in diameter. Each cutter is powered by a miniature hydraulic pump and 115-volt electric motor.

Hydraulic Pump
Each rebar cutter contains a built-in hydraulic pump with innovative magnetic particle filtering. All parts are machined to tight tolerances for maximum performance.

Blades
Cutting blades are manufactured from heat-treated, high-strength machine steel, easily rotated for prolonged use and increased service life.

Use the BC-25 for high-production. This electro-mechanical cutter can be bench-mounted at the shop or operated on site from the back of a pickup truck. Continuous cycle mode maximizes speed and efficiency. Features a powerful 115-volt electric motor and blades for quick, accurate cuts of rebar up to 1" thick.

Reliability is guaranteed. Prior to delivery, each machine is subjected to no-load tests and actual load tests.

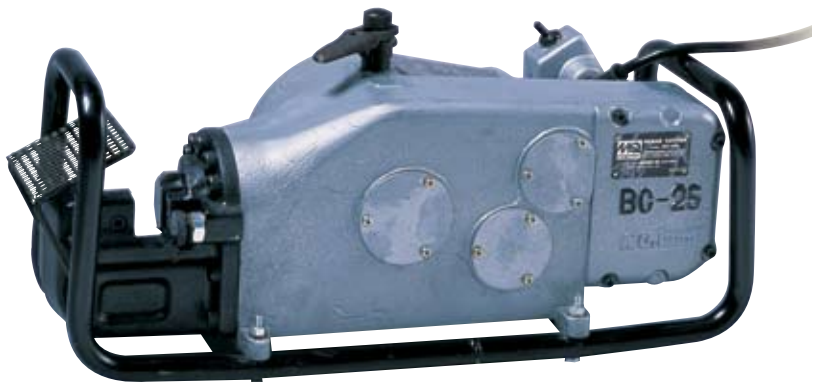

Model BC-25 cuts rebar up to 1" and offers continuous cycling for high production.

Always wear approved safety equipment and clothing when operating these machines.



Rebar Bender


Speed up production with the Multiquip MB-25HD Rebar Bender. This portable, operator-friendly machine bends up to 1" diameter rebar in seconds.

Rollers and collars in a variety of diameters are included to bend a full range of bar sizes up to 1" diameter (#8 rebar). A foot switch is included for high-production bending. The MB-25HD Rebar Bender is easy to operate and is practically maintenance-free.

- Single-phase, 115-volt universal motor
- Compact design for use on the jobsite or in the shop
- User-friendly design features push-button start and stop
- Single control knob selects precise bending angle from 0° to 180°
- Electro-magnetic clutch is close-coupled to the motor
- Motor runs only during bending operation for lower noise level and energy efficiency
- Electro-mechanical design with sealed gear case prevents contamination and requires no maintenance
- Four built-in lifting handles for portability
- Tool kit included
- Waterproof cover



Model MB-25HD can bend 1" rebar a full 180 degrees in just 5 seconds and handles up to 4 pieces of 1/4" rebar at a time.

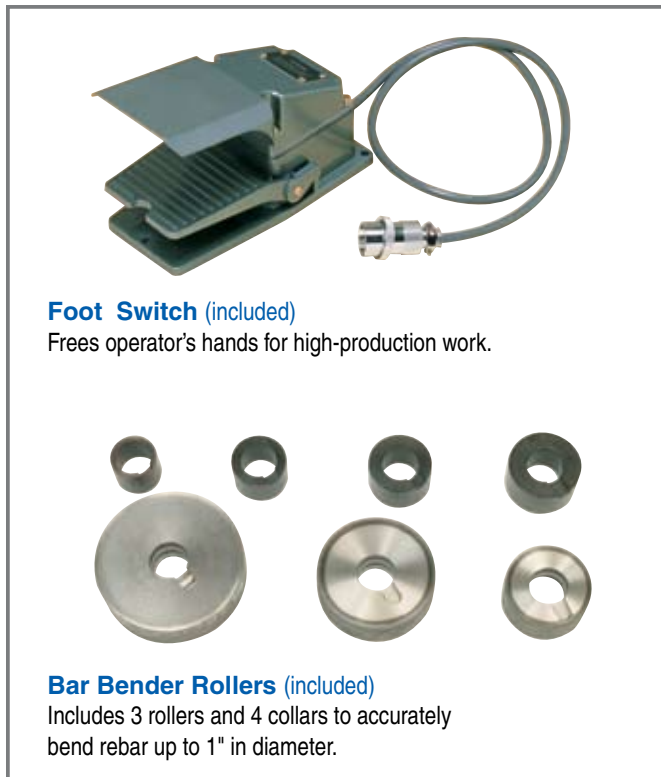

Rebar Bending Capacity

Grade 40 Intermediate Grade — 70,000 psi	3/8" to 1" (9 to 25.4 mm)
Grade 50 High Grade — 80,000 psi	3/8" to 1" (9 to 25.4 mm)
Grade 60 High Strength Grade — 90,000 psi	3/8" to 7/8" (9 to 22.2 mm)

Always wear approved safety equipment and clothing when operating these machines.

For your safety, these products should not be used with ungraded rebar.

Rebar Cutters & Benders – Specifications

REBAR CUTTERS

Model	HBC-19	HBC-25	BC-25
Cutting Capacity Grade 40			
Bar Size	No. 6	No. 8	No. 8
in. (mm)	¾ (19)	1 (25)	1 (25)
Cutting Capacity Grade 50			
Bar Size	No. 6	No. 8	No. 8
in. (mm)	¾ (19)	1 (25)	1 (25)
Cutting Capacity Grade 60			
Bar Size	No. 5	No. 7	No. 7
in. (mm)	⅝ (16)	⅞ (22)	⅞ (22)
Max. Cutting Speed	3 sec.	4.5 sec.	9 sec.
Rated Power	9 amp.	12 amp.	12 amp.
Electric Motor	115 volt, 60 Hz, single-phase AC		
Dimensions and Weight			
Length in. (cm)	15.3 (38)	18.3 (46.4)	23.8 (60.4)
Width in. (cm)	4.4 (11)	5.9 (15)	9.8 (25)
Height in. (cm)	8.8 (23)	9.4 (24)	9.5 (24)
Weight lb. (kg)	27 (12.2)	48 (22)	129 (58)
Standard Equipment			
Hex Wrenches	3	3	3
Hydraulic Oil	3	3	N/A
Carrying Box	Wood	Wood	N/A

REBAR BENDERS

Model	MB-25HD
Maximum Bending Capacity in. (mm)	
1 (25.4)	
Range of Bends	
0° to 180°	
Standard Bending Radius	
Rebar No. in. (mm)	Radius in. (mm)
No. 3 — ⅜ (9.5)	¾ (19)
No. 4 — ½ (12.7)	²⁹ / ₃₂ (23)
No. 5 — ⅝ (15.9)	1 ⁷ / ₆₄ (28)
No. 6 — ¾ (19)	1 ⁷ / ₈ (47.5)
No. 7 — ⅞ (22.2)	2 ¹ / ₆₄ (55)
No. 8 — 1 (25.4)	2 ¹⁵ / ₃₂ (62.5)
Maximum Bending Speed	
Approximately 5 seconds for 180° angle	
Motor Specifications	
Electric Motor*	115V, 60 Hz, Single Phase, AC
Rated Power (amps)	15
Dimensions and Weight	
Dimensions LxWxH in. (cm)	16.1x17.9x19.5 (41x45x136)
Weight lbs. (kg)	300 (136)
Standard Equipment	
Foot Switch	
Rollers (3 sizes)	
Collars (4 sizes)	
Tool Kit	
Waterproof Cover	

© COPYRIGHT 2006, MULTIQUIP INC.

* International Standard Voltage and Hz Electric Motor models available upon request. Specify Voltage and Hz with order.

