



# Plaster & Fireproofing Pumps

Mayco Pump Division of Multiquip



Products Built for Maximum Productivity



Plaster & Fireproofing Pump  
with Mixer



Plaster &  
Fireproofing Pump



Fireproofing  
Pump

# MG-30 High Production Plaster and Fireproofing Pump

- **Centralized grease panel** — allows greasing of all bearings without opening the hood.
- **Fully enclosed lubrication box** — eliminates oil puddles under your pump.
- **Gravity feed piston cup oiler** — maximum efficiency; increases piston cup service life.
- **Heavy duty drive line** — thicker 2<sup>15</sup>/<sub>16</sub>" crankshaft; McGill bearings; cast iron step cone pulley — for longer service life and minimum downtime for repairs.
- **Adjustable piston stroke and piston cycling rates** — allows fine tuning of pump output to meet production needs of any job. Eight possible pumping rates!
- **Pump manifold cast from stronger steel with thicker walls** — increases service life.
- **Hardwire remote standard** — allows easy control by nozzleman.

## Mayco Plaster and Fireproofing Pumps — MG-30

Mayco material pumps = higher production = higher profits. The expertise and know-how that has made Mayco the leading manufacturer of small line concrete and grout pumps is an integral part of the design of the MG-30. Mayco material pumps are powerful, rugged, reliable and efficient — engineered to meet the challenging production requirements of high-volume projects and built to withstand the punishment on any job-site.

- Gravity Feed Piston Lubrication
- Heavy-duty drive assembly — consists of a larger 2<sup>15</sup>/<sub>16</sub>" crankshaft, steel crank bearing and heavy-duty connecting rod.


### MG-30 Options

- **The "Mobile" Package:**  
An MG-30M pump with the Essick EM120 model 12ft.<sup>3</sup> plaster/fireproofing mixer mounted on a trailer.

- **The "Tag" Package:**  
Trailer-mounted MG-30T without mixer.
- **Fire Chief Package:**  
Delivery rate maximized by modified material valving, which includes; steel balls, the FireWizard and a 3" pump outlet.
- **The Plastering Package:**  
Features the standard material manifold and 2" pump outlet.

### Designed for high production placement of:

- Exterior stucco, sand/cement exterior basecoat (brown & scratch)
- Gypsum plaster and lightweight aggregate
- Interior basecoat plaster
- Pool plaster, including Pebble-Tec<sup>®</sup>
- Fireproofing/high production

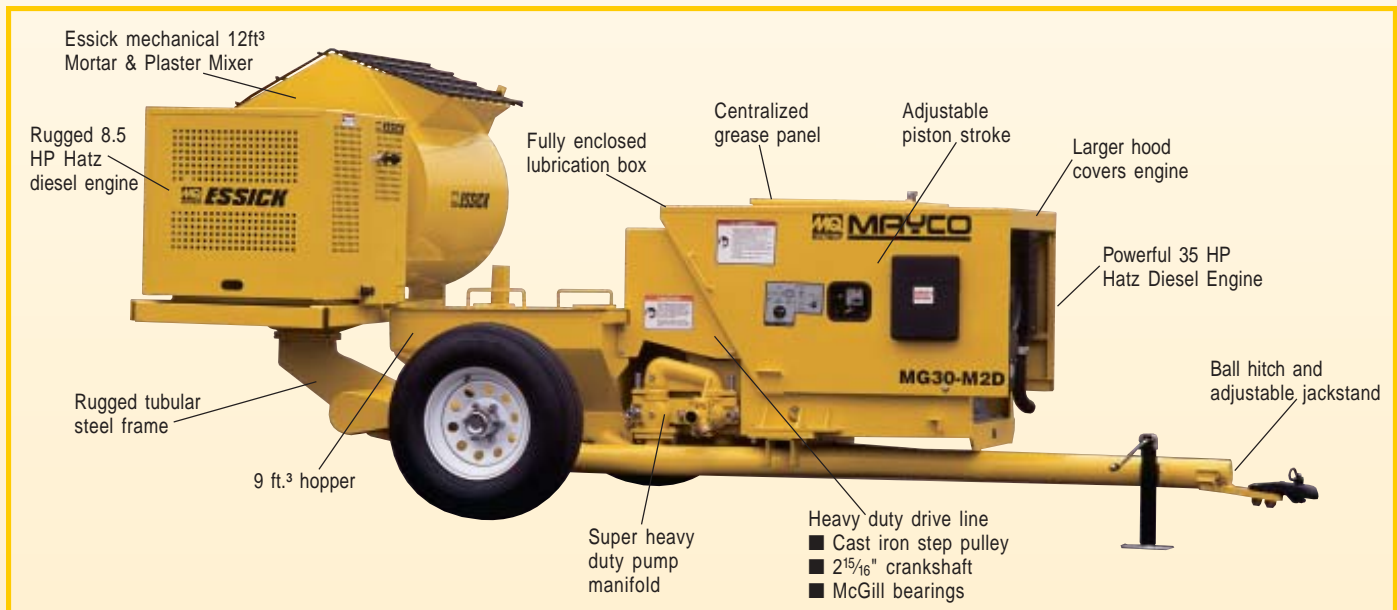

## The Mayco Fire Chief — High-Volume Fireproofing Applications



For fireproofing applications, such as applying W.R. Grace Mono-Kote®, the pump stroke easily and quickly converts to long stroke.

The MG-30 offers increased volume and includes the following options:

- 3 ¾" material cylinders
- FireWizard Adaptor (Fire Proofing Kit)
- Steel balls and special valve seats
- Big 3" outlet on pump manifold



Variable volume output for different Fireproofing applications. Mayco has the right pump for your job.



The **MSE-1SS** is designed and engineered to provide pulse-free low volume production all day long. This mighty-mite is ideal for application of textures, full and simulated acoustics, fireproofing and bagged grout materials.

This innovative material pump is ideal for small-to-medium size jobs that require you to work in limited access areas. The MSE-1SS is so compact that you can transport it from job to job in the trunk of a car. Heavy-duty caster mounted wheels enable the operator to easily maneuver the Essick Mini-Sprayer on the job site.

- **Pump motor** — ¾ HP, 110V, single phase electric motor with reset button.
- **Air compressor** — Gast ¾ HP, 110V, single phase, rotary vane air compressor delivers 9 cfm at 10 psi.
- **Hopper** — large 24-gallon hopper fabricated from 18-gauge stainless steel includes easy-access pump clean-out.
- **Pump** — specially designed 1L3 rotor-stator delivers up to 0.3 ft.<sup>3</sup>/min of material at up to 80 psi delivery pressure. Sealed bearings on drive shaft increase service life.
- **Optional volume control** — allows operator to vary pump output with the turn of a knob.
- **Hose** — 1" x 25' material hose assembly with airline and remote control cord included with pump.
- **Controls** — 12V DC on/off control switch at nozzle with 25 feet of electrical cord.
- **Nozzle** — 1" x 36" light weight nozzle with two ¾" one ½" and one ⅝" orifice tips included with pump.
- **Dimensions (LxHxW)**: 26 ½" x 14 ½" x 30 ½"
- **Weight** — 185 lbs. complete.

### Optional MSE1SS equipment:

- Hose extension kit — 1" x 25'
- Bypass valve — for volume control

# SPECIFICATIONS

## MG-30 Plaster/Fireproofing Pump

Model	Pumping Rate	Material Cylinder Size	Pump Pressure	Pump Outlet	Power	Fuel Capacity gal.	Compressor	Weight lb.	LxWxH in.
<b>Plaster/Mortar Pump (TAG) without mixer</b>									
MG30T2G	6½ yd. <sup>3</sup> /hr.	3½" x 6"	1000 psi	2"	30 HP Wisconsin VH4D gasoline	5.3	10 CFM @ 90 psi	2260	121" x 59" x 46"
MG30T2D	6½ yd. <sup>3</sup> /hr.	3½" x 6"	1000 psi	2"	35 HP Hatz 2M41 diesel	5.3	10 CFM @ 90psi	2560	121" x 59" x 46"
<b>Plaster/Mortar Pump (Mobile) with 12 ft.<sup>3</sup> mixer</b>									
MG30M2G	6½ yd. <sup>3</sup> /hr.	3½" x 6"	1000 psi	2"	30 HP Wisconsin VH4D gasoline	5.3	10 CFM @ 90 psi	3450	169" x 86" x 84"
MG30M2D	6½ yd. <sup>3</sup> /hr.	3½" x 6"	1000 psi	2"	35 HP Hatz 2M41 diesel	5.3	10 CFM @ 90 psi	3750	169" x 86" x 84"
<b>Fireproofing Pump (TAG) without mixer</b>									
MG30T3G	9½ yd. <sup>3</sup> /hr.	3¾" x 8"	1000 psi	3"	30 HP Wisconsin VH4D gasoline	5.3	10 CFM @ 90 psi	2260	121" x 59" x 46"
MG30T3D	9½ yd. <sup>3</sup> /hr.	3¾" x 8"	1000 psi	3"	35 HP Hatz 2M41 diesel	5.3	10 CFM @ 90 psi	2560	121" x 59" x 46"
<b>Fireproofing Pump (Mobile) with 12 ft.<sup>3</sup> mixer</b>									
MG30M3G	9½ yd. <sup>3</sup> /hr.	3¾" x 8"	1000 psi	3"	30 HP Wisconsin VH4D gasoline	5.3	10 CFM @ 90 psi	3460	169" x 86" x 84"
MG30M3D	9½ yd. <sup>3</sup> /hr.	3¾" x 8"	1000 psi	3"	35 HP Hatz 2M41 diesel	5.3	10 CFM @ 90 psi	3750	169" x 86" x 84"

Model — EM120S	Capacity (bags)	Capacity (ft. <sup>3</sup> )	Power	Drive	Dump Action
Mixer	3½ to 4	12	8.5 HP Hatz Diesel 1B30 or 11.0 HP Honda GX-340	Mechanical	Manual

## MSE-1SS

Model	Pumping Rate	Pump type	Power	Compressor	Weight lbs. (kg)	Dimensions LxWxH
MSE-1SS	3 gal./min.	1L3 Rotor-Stator	1.5 HP 110V AC	9 CFM @ 10psi	175 (79.5)	26½" x 14½" x 30½"

Your Multiquip dealer is:



**MULTIQUIP INC.**  
 P.O. BOX 6254  
 CARSON, CA 90749  
 310-537-3700 • 800-421-1244  
 FAX: 310-537-3927  
 E-MAIL: mq@multiquip.com  
 www.multiquip.com

Atlanta • Boise • Newark • Montreal, Canada  
 Manchester, UK • Rio de Janeiro, Brazil • Guadalajara, Mexico